
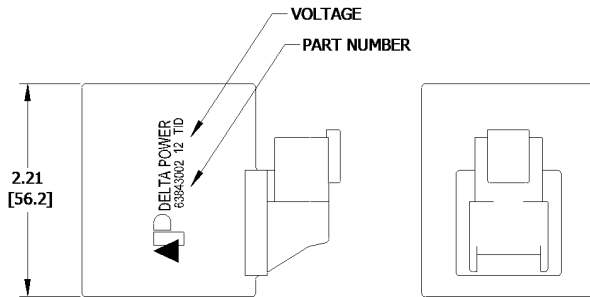


IMMERSION PROOF "T" TYPE "I" COILS



DESCRIPTION

3/4 inch (19.2 mm) I.D. Immersion Proof Coil.


FEATURES

One piece encapsulated design that is:


- Weatherproof
- Immersion proof
- Thermal shock / dunk tested
- No external metal shell

COIL SPECIFICATION



Wattage	24 Watts Nominal
Duty Rating	Continuous Duty ±10% rated voltage at 70°F (21°C) ambient
Min Current for Actuation	90% of rated current at room temperature
Magnet Wire Class	H or Better for all voltages
Temperature Range	-40° to 392°F (-40° to 200°C)
Encapsulation Material	Thermo-Plastic, resistant to moisture, caustic solutions, fungus and vibrations




IA



ID



ORDERING INFORMATION



Approximate Coil Weight: .49 lbs (.22 kg)

VOLTAGE

12 VDC / 2.25 Amp Yellow Lettering
 24 VDC / 1.13 Amp Blue Lettering

NOTE: One O-ring 60118115 on each end of coil required for environmental sealing. Standard On-Off product coil retention nut 36202101 is compatible with "TI" coils, only additional O-ring is necessary.

Nut kits are available for each valve type. – Consult Factory.

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

W7 / 12-2022