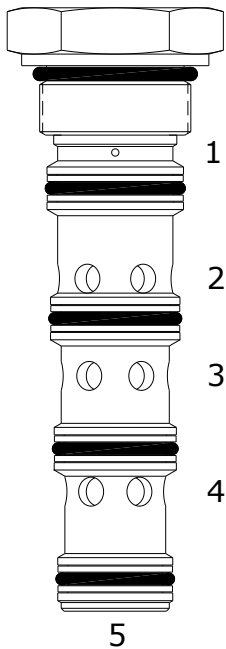


HSO-PTT PILOT TO SHIFT, 3WAY VALVE, CLOSED TRANSITION

DESCRIPTION

16 size, 1 5/16 -12 thread, "Sixteen" series, pilot to shift, 3 way valve, closed transition.

OPERATION

In neutral the HSO-PTT allows flow between ports (3) and (4), port (2) is blocked.

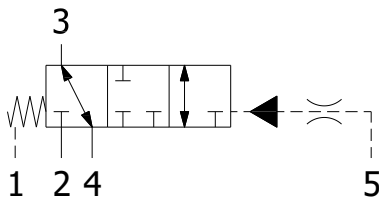
With application of a remote pilot signal at (5), the valve's spool shifts to allow flow between ports (2) and (3), while port (4) is blocked. During transition all ports are closed.

The spring chamber is vented to the tank through port (1). The vented spring chamber allows the valve to be fully pressurized at ports (2), (3), and (4) without affecting required pilot pressure.

Pressure at (1) will affect required pilot pressure.

FEATURES

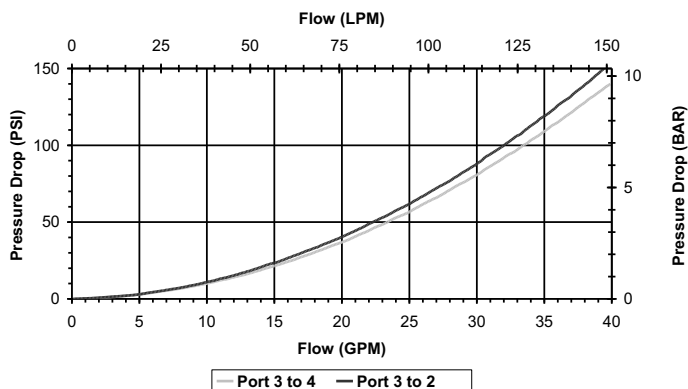
- Hardened parts for long life.
- Industry common cavity.

HYDRAULIC SYMBOL


Do not use orifice disk under cartridge valve.

PERFORMANCE

Actual Test Data (Cartridge Only)


VALVE SPECIFICATIONS

Nominal Flow	35 GPM (132 LPM)
Rated Operating Pressure	4200 PSI (290 bar)
Typical Nominal Leakage (150 SSU)	30 cu in/min (0.5 l/min)
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	ISO 18/16/13
Media Operating Temperature Range	-40° to 250° F (-40° to 120° C)
Weight	1.08 lbs. (0.49 kg)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Torque Requirements	90 ft-lbs (122 Nm)
Cavity	SIXTEEN 5W SHORT
Cavity Form Tool (Finishing)	40500038
Seal Kit	21191410

