

IMMERSION PROOF "L" TYPE "I" COILS

DESCRIPTION

5/8 inch (16 mm) I.D. Immersion Proof Coil.










FEATURES

One piece encapsulated design that is:

- Weatherproof
- Immersion proof
- Thermal shock / dunk tested
- No external metal shell

COIL SPECIFICATION

Wattage	26 Watts Nominal
Duty Rating	Continuous Duty ±10% rated voltage at 120°F (49°C) ambient
Min Current for Actuation	80% of rated current at room temperature
Magnet Wire Class	H or Better for all voltages
Temperature Range	-40° to 392°F (-40° to 200°C)
Encapsulation Material	Thermo-Plastic, resistant to moisture, caustic solutions, fungus and vibrations

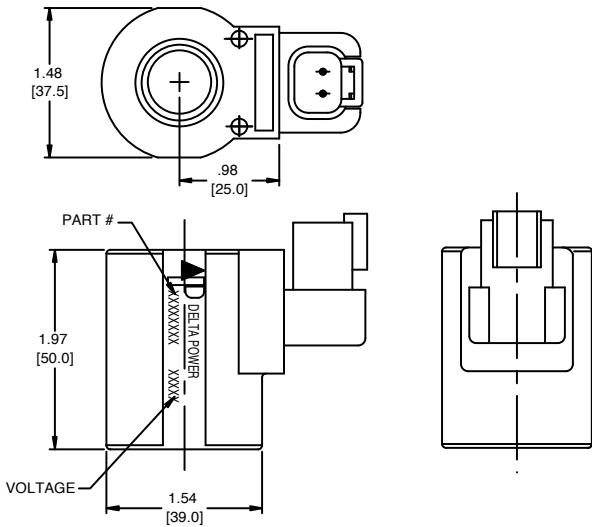

ORDERING INFORMATION

L	-	-
TERMINATIONS		
AMP Superseal 1.5 – Integral (282104.1), mates w/282080.1 & Metri-pack 12052641	IA	12
Deutsch – Integral DT04-2P, mates w/DT06-2S	ID	24
AMP Jr. Timer – Integral (84-9419)	IJ	
Metri-pack 150.2 Series – Integral (12066016), mates w/12162193	IM	

Approximate Coil Weight: .49 lbs (.22 kg)

VOLTAGE

12 VDC / 2.2 Amp Yellow Lettering
 24 VDC / 1.1 Amp Blue Lettering

NOTE: Pull type valves require nut 36202073 in lieu of standard nut.
 Push type valves require nut 36202071 in lieu of standard nut.

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.